


Model TPD120180A32

Features

- Excellent phase& amplitude balance
- Low Insertion Loss& VSWR
- High Isolation





Technical Data Sheet			
Frequency Range	12~18GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤4.2dB (Above 15.05dB Split)	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.90:1 Output ≤1.60:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥15dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±1.2dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±14°	Operating Temperature	-55~+85°C
¹ Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	1510g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

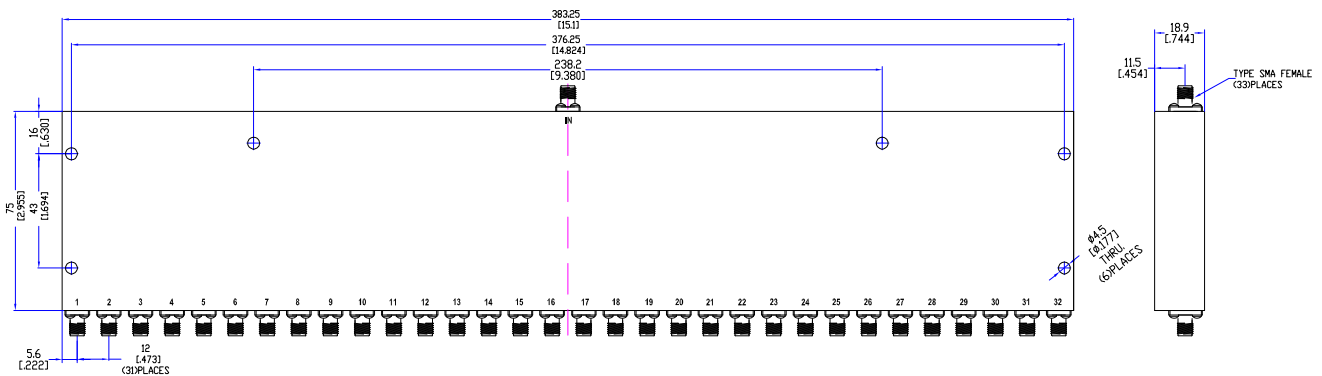

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR

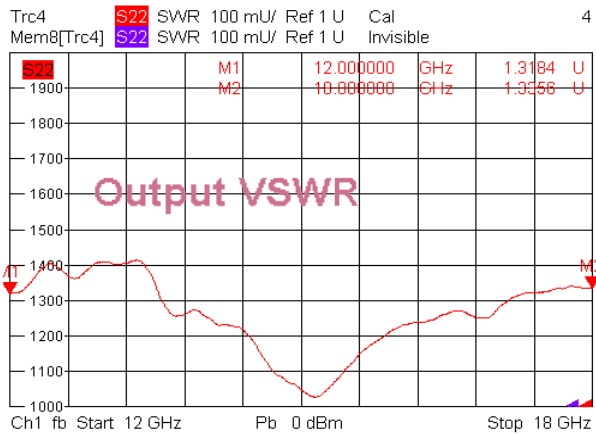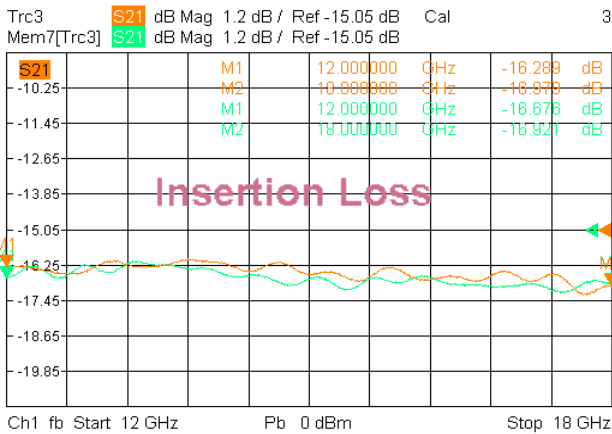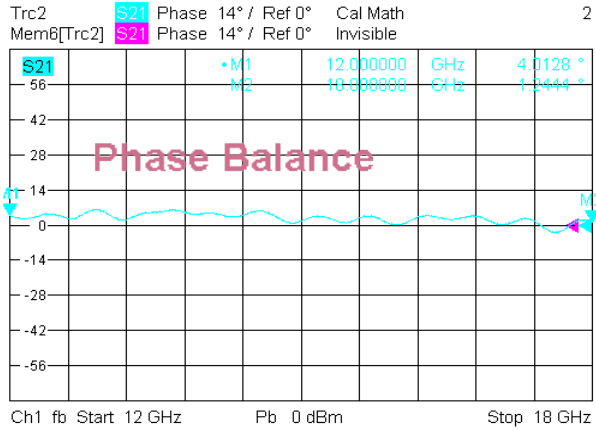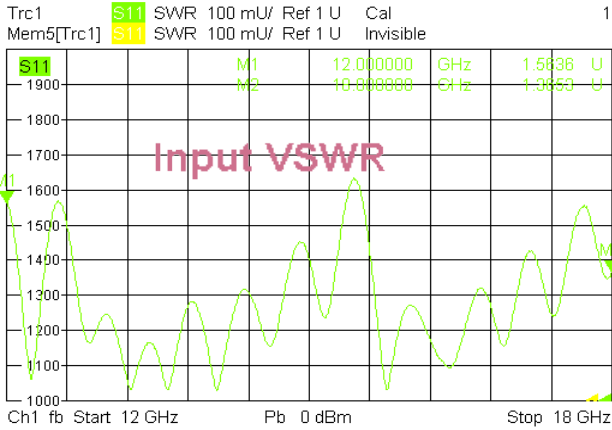


7/19/2021, 11:34 AM




Typical Performance

2. Insertion Loss, Amplitude & Phase Balance, VSWR

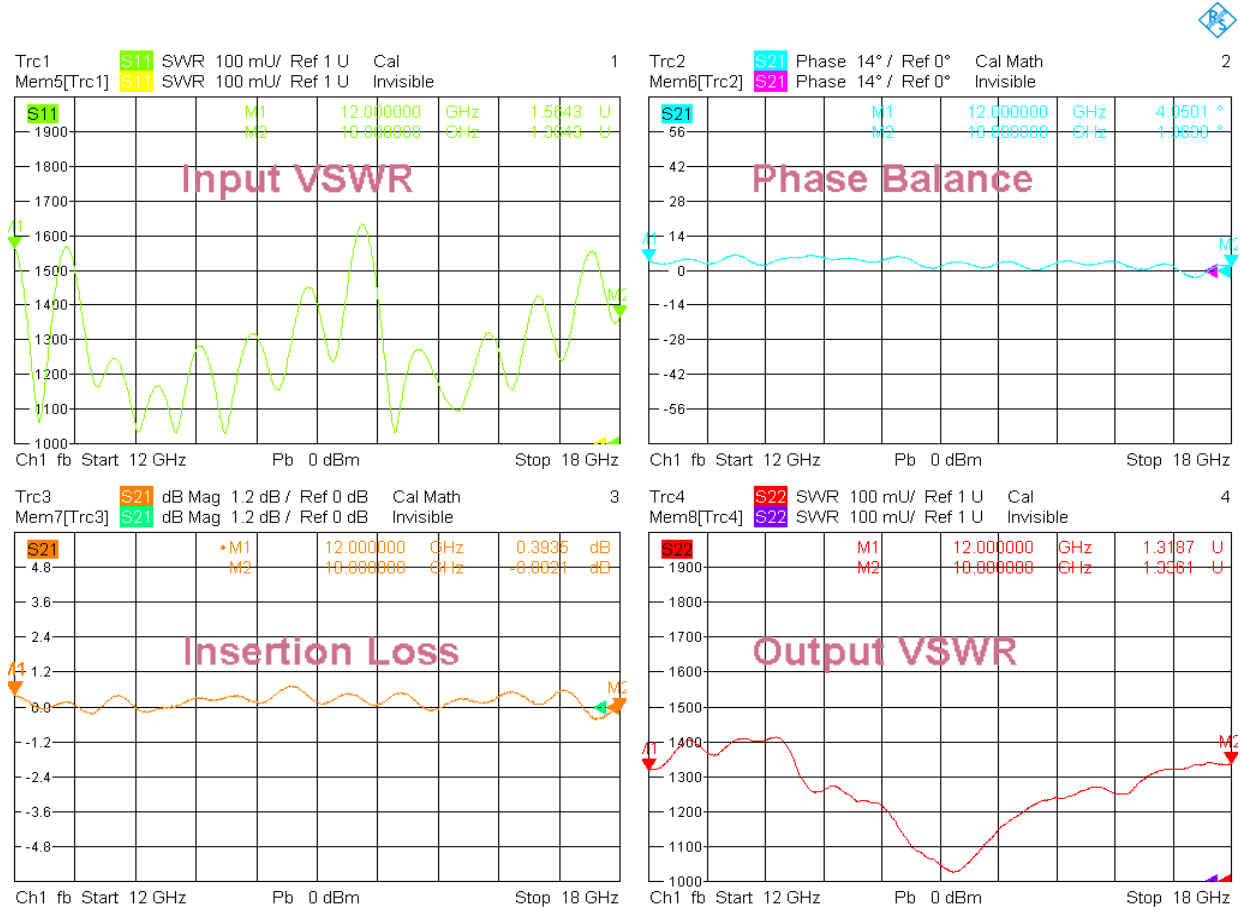

7/19/2021, 11:34 AM

3. Insertion Loss

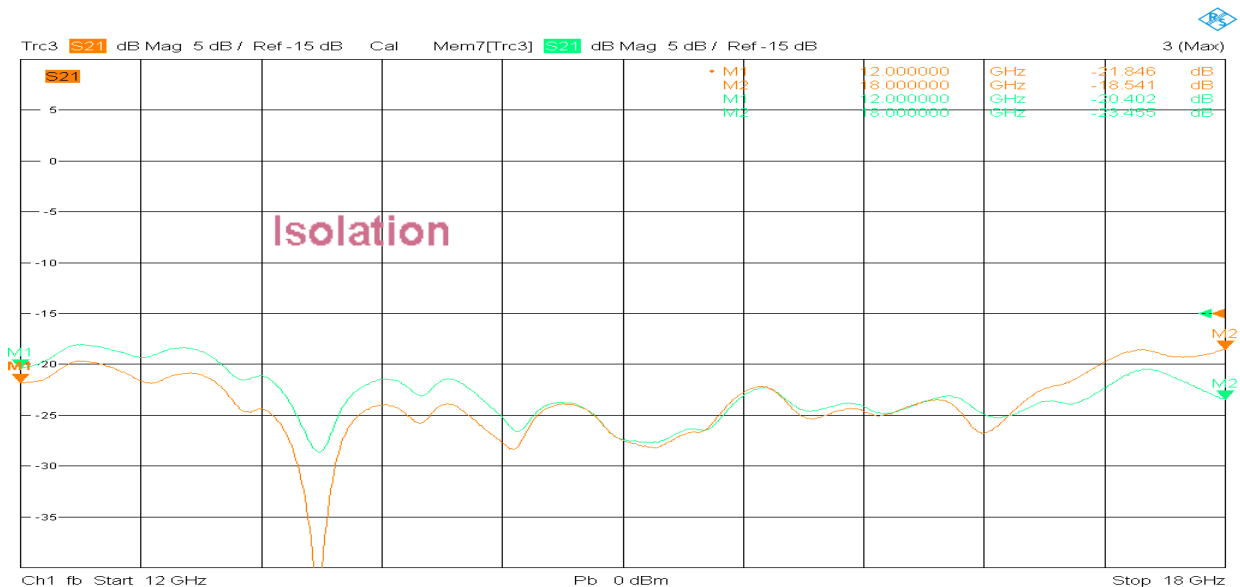

7/19/2021, 11:18 AM

