


Model TDC60120N40DH

Features

Low VSWR
High Directivity
Broadband & Miniature Size


Technical Data Sheet			
Frequency Range	6~12GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.0dB (Excl. Coupling Loss 0.01dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤40±1dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±1dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥10dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.50:1 Secondary ≤1.50:1	Operating Temperature	-20~+65℃
¹ Power Handling	Incident ≤100Watt; Reversed ≤100Watt	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	260g
Port Connectors	Mainline: N-Female Secondary: N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

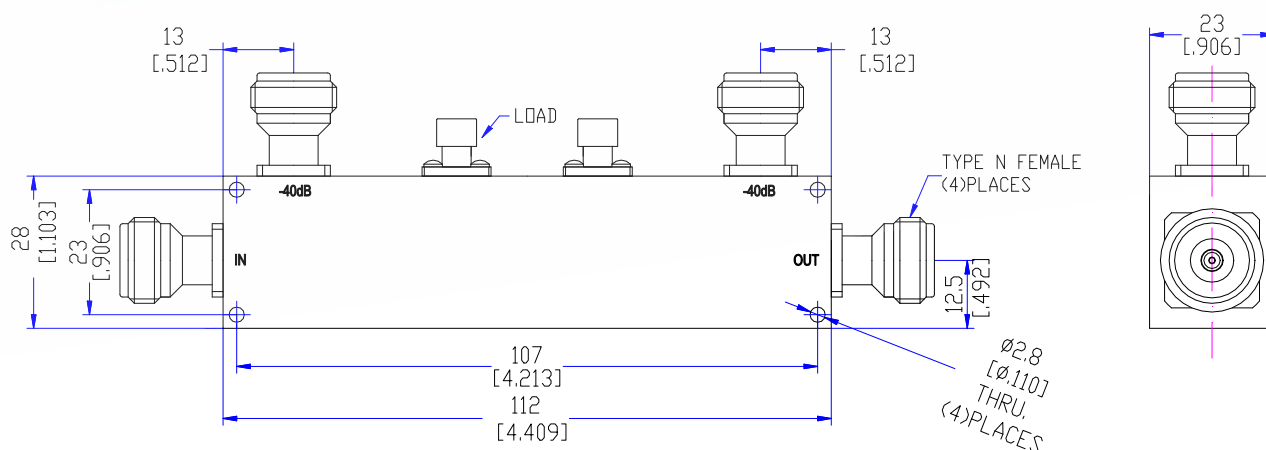

Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

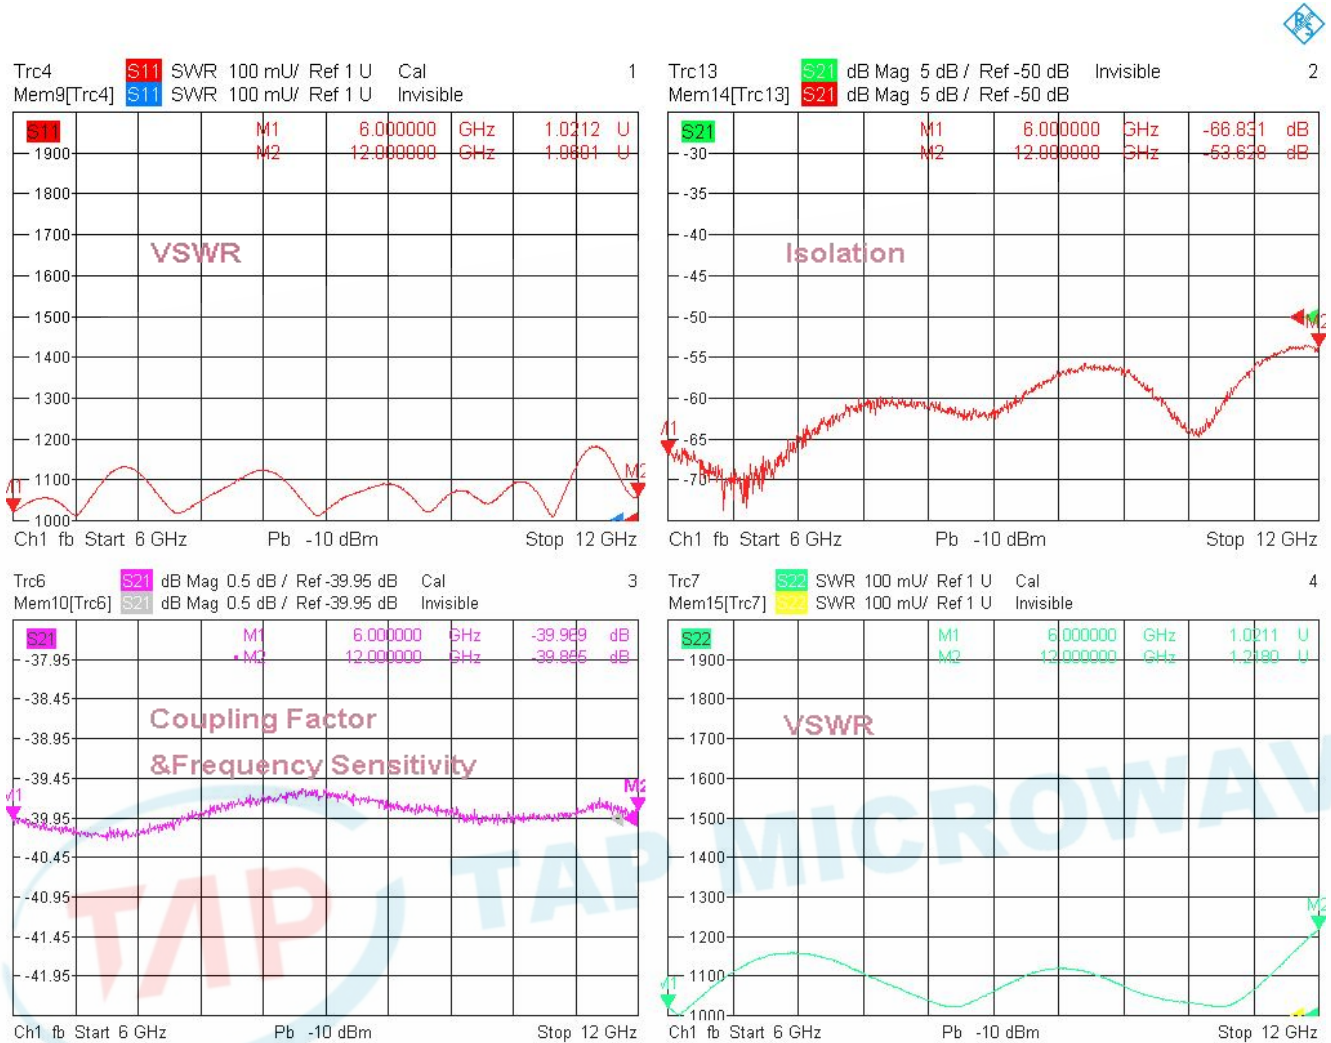


8/6/2025, 2:01 PM




Typical Performance

2. Coupling Factor & Sensitivity, Isolation, VSWR

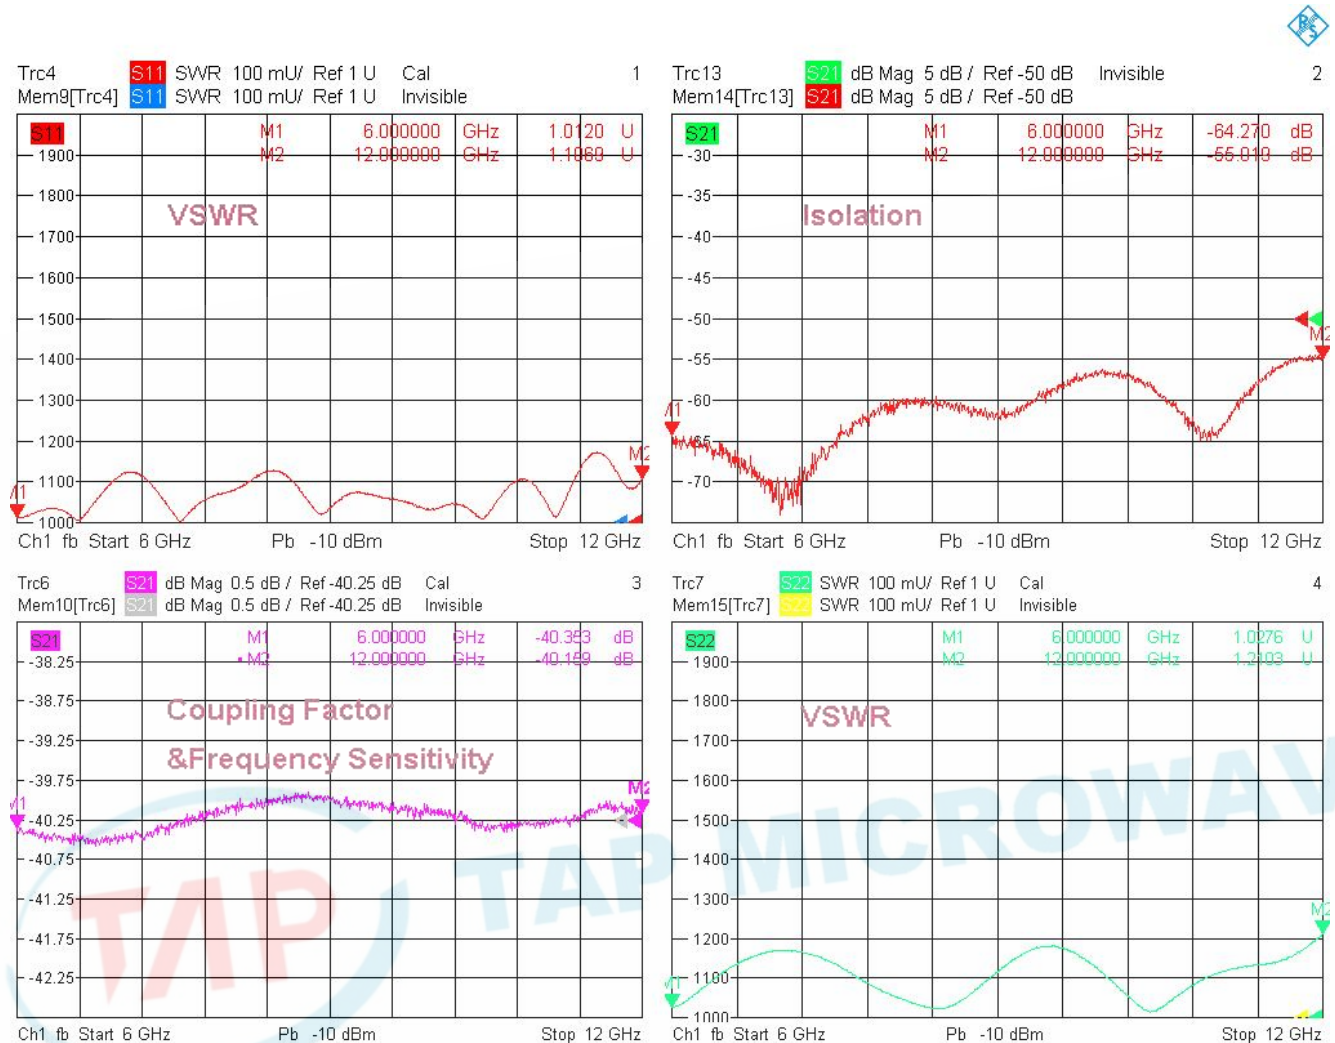

8/6/2025, 2:02 PM

3. Insertion Loss

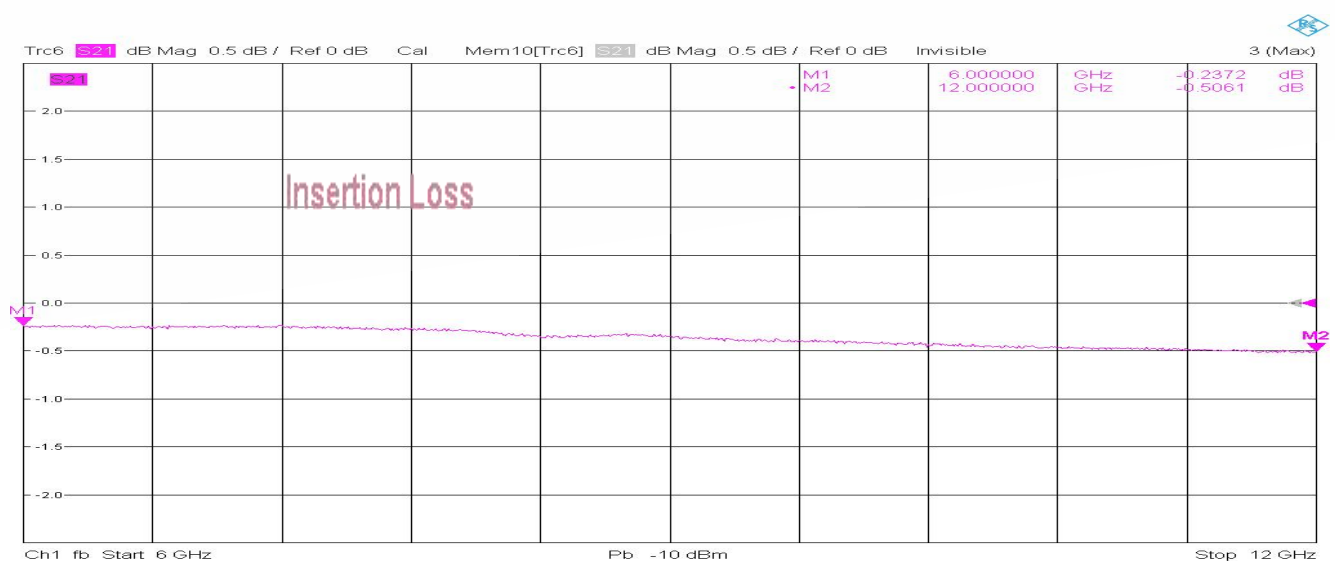

8/6/2025, 2:03 PM

