


Model THC0210A

Features

Excellent phase& amplitude balance
Low Insertion Loss& VSWR
High Isolation


Technical Data Sheet			
Frequency Range	200~1000MHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.8dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥18dB		
Amplitude Balance	≤±0.6dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±5°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.30:1	Operating Temperature	-55~+85℃
¹ Power Handling	Average ≤100Watt Peak ≤1KW	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	90g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

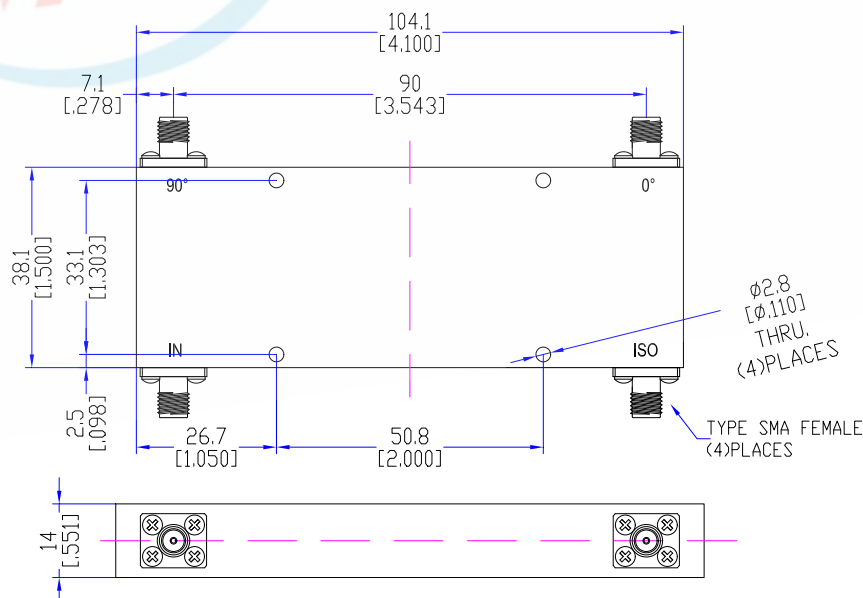


Typical Performance

1. Insertion Loss, Amplitude& Phase Balance, VSWR

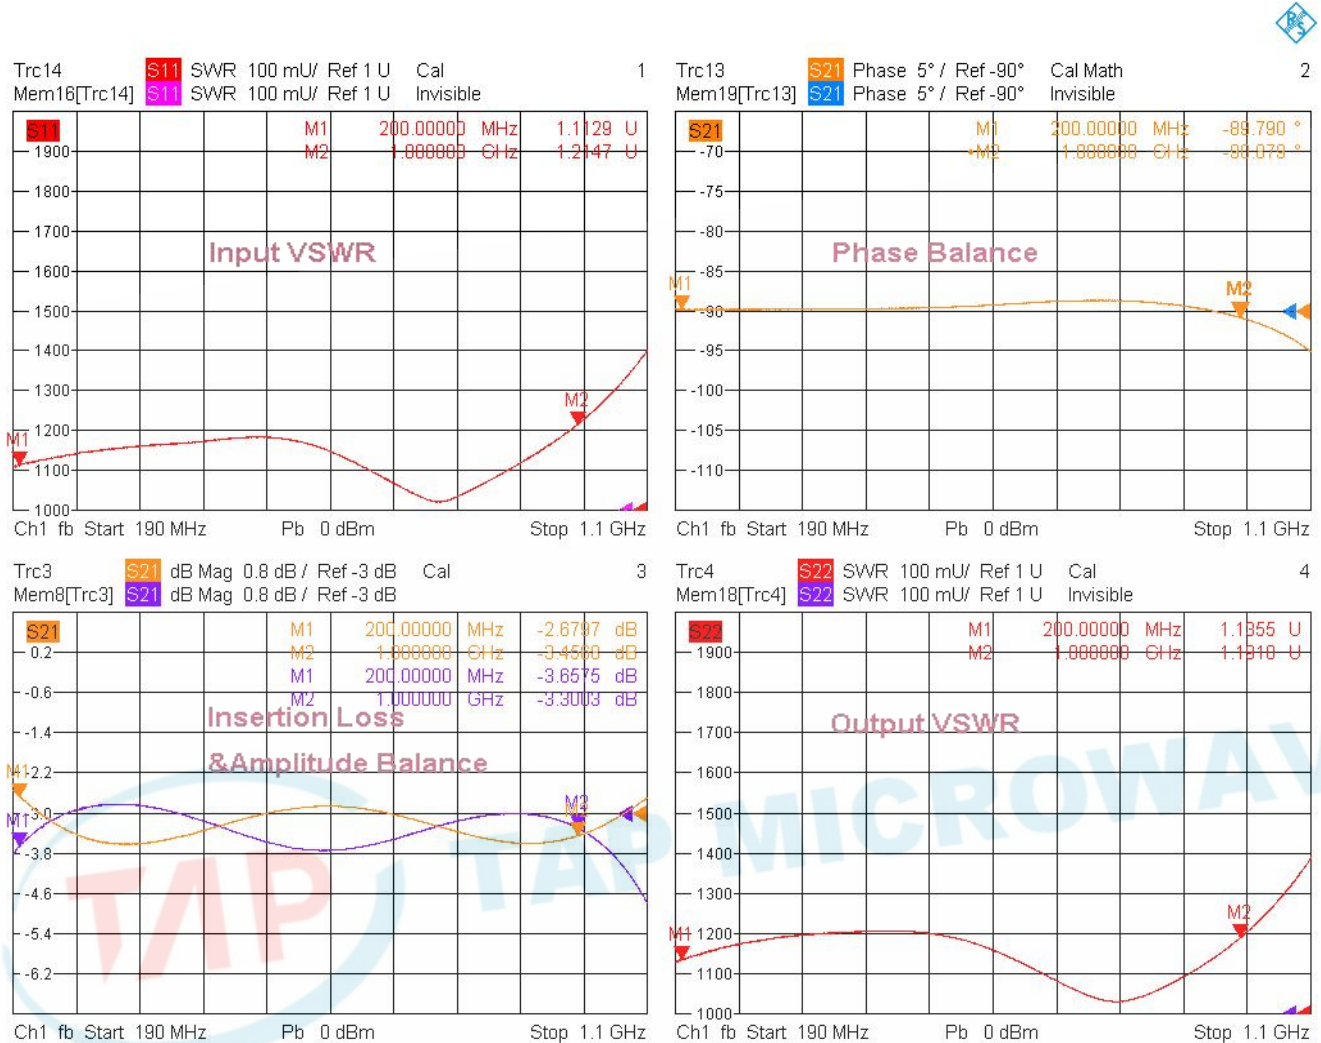

11/7/2024, 10:55 AM

2. Isolation

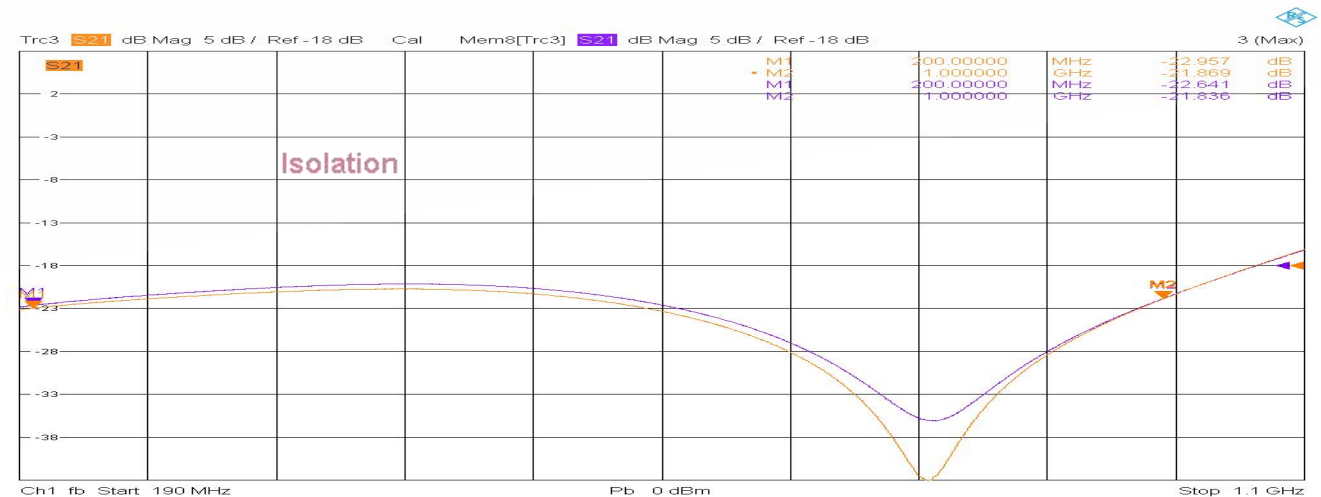

11/7/2024, 10:56 AM

