

Model TPB01400A04

Features



Excellent phase& amplitude balance

Low Insertion Loss& VSWR


High Isolation

Technical Data Sheet			
Frequency Range	0.1~40GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.2dB	Connector Body	Passivated Stainless Steel
VSWR	Input ≤1.80:1 Output ≤1.80:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥18dB	Connector Pin	Beryllium Copper, Gold Plate
¹ Power Handling	Voltage ≤ 12V; Current ≤ 400mA	Solder	Lead Free, RoHS Compliant
Impedance	50Ω	Operating Temperature	-55~+85℃
Port Connectors	2.92mm-Female	Operating Humidity	Up to 95%,Non- Condensing
		Weight	30g

¹Power Handling guaranteed when load's VSWR within 1.50:1.

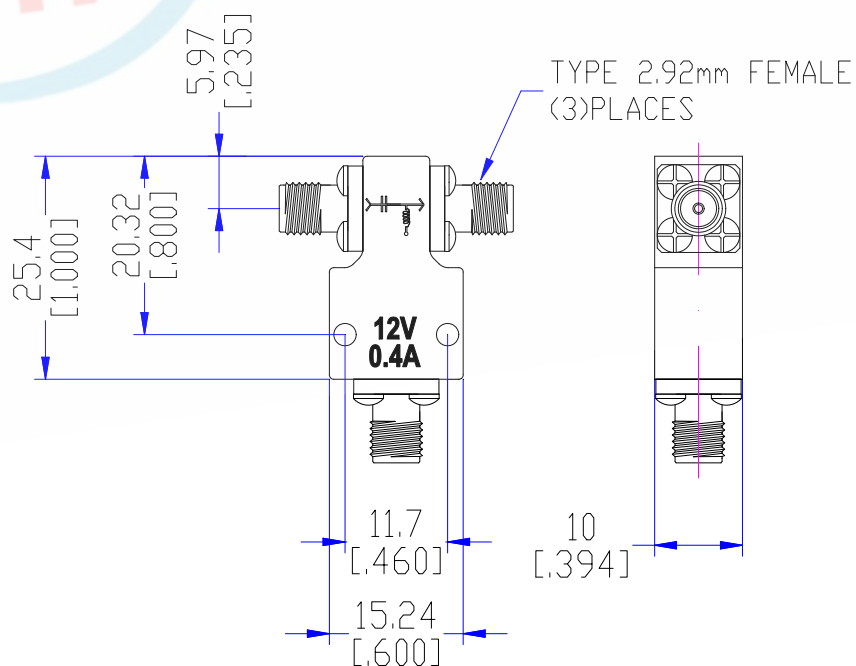

Insertion Loss, Isolation, VSWR

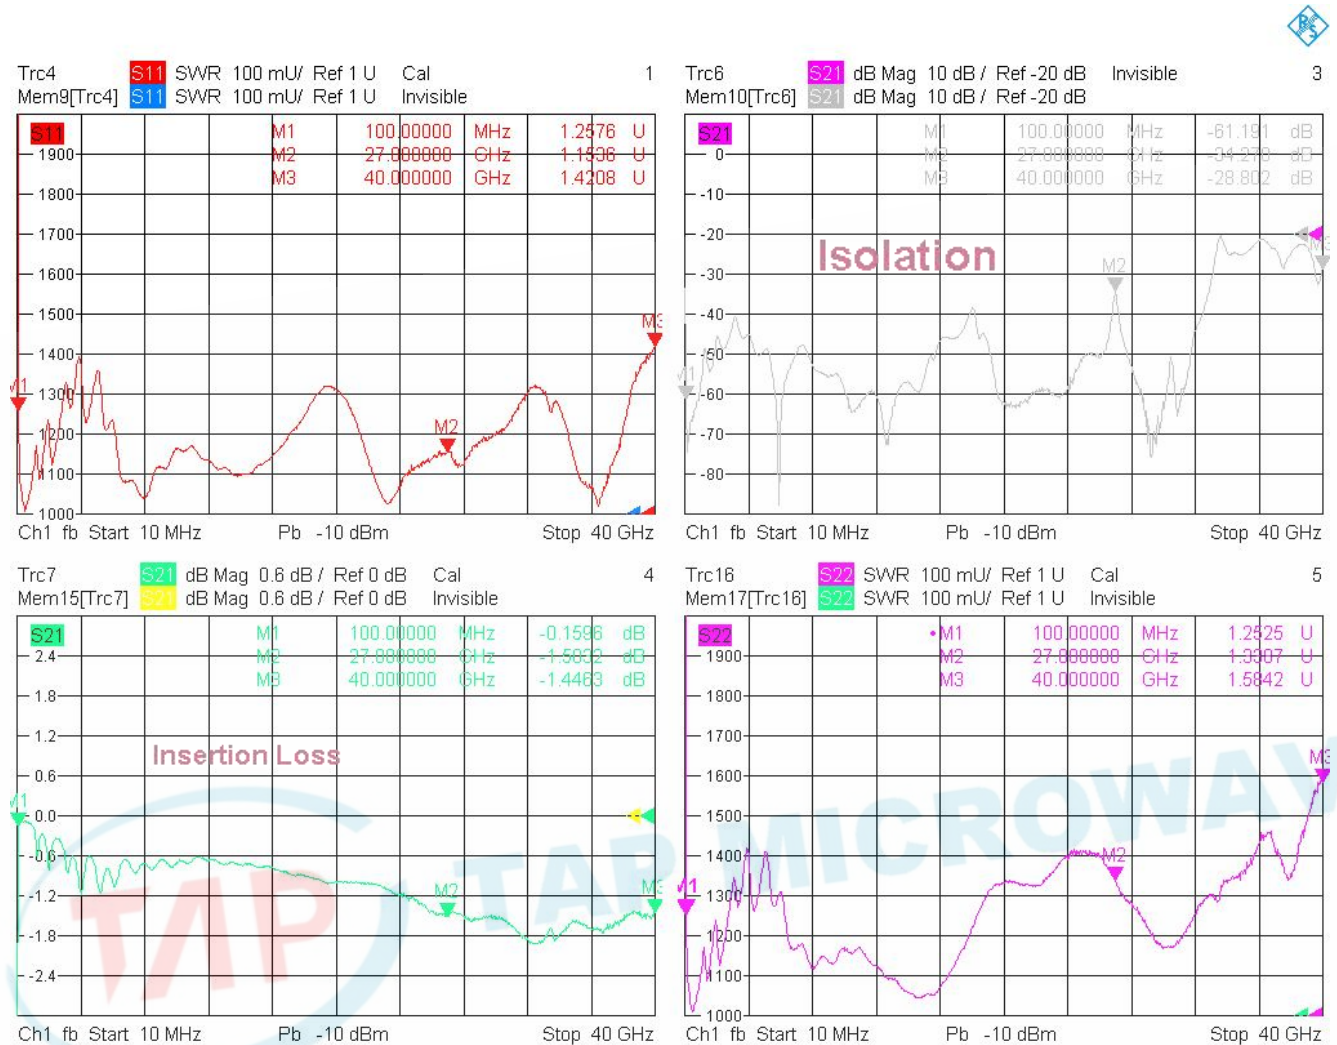

12/6/2022, 2:44 PM

