


## Model TPD0405N2HC

### Features

- Excellent phase & amplitude balance
- Low Insertion Loss & VSWR
- High Isolation


Technical Data Sheet			
Frequency Range	400~500MHz	Finish	Natural Oxygen
Insertion Loss	≤0.3dB (Above 3.01dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.20:1 Output ≤1.20:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥20dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.2dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±2°	Operating Temperature	-40~+65°C
<sup>1</sup> Power Handling	≤256Watt Peak power, duty cycle 20 %	Operating Humidity	Up to 95%, Non-Condensing
Impedance	50Ω	Weight	250g
Port Connectors	N-Female		

<sup>1</sup>Power Handling guaranteed when load's VSWR within 1.50:1.

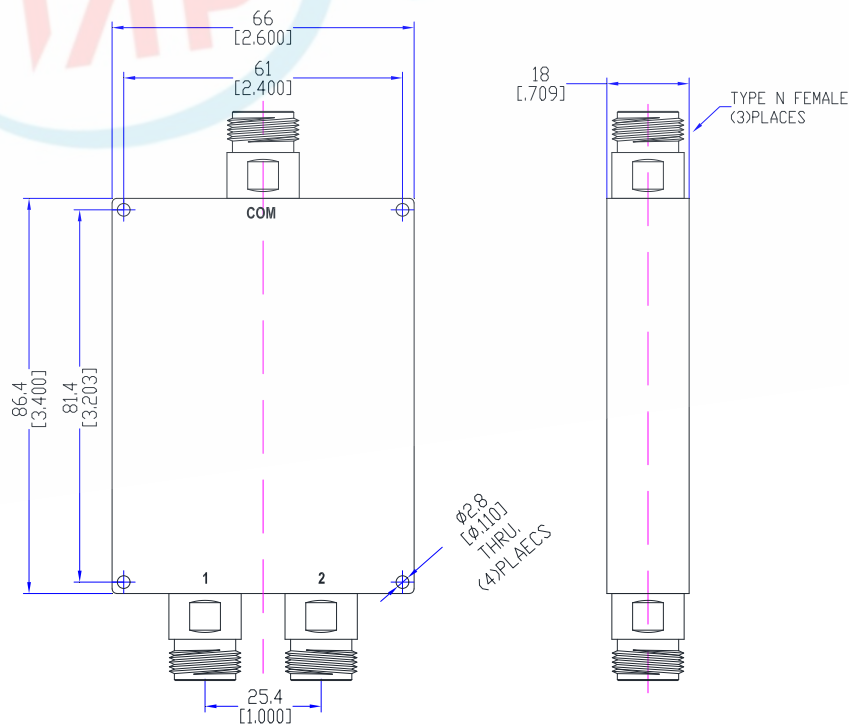

## Typical Performance

### 1. Insertion Loss, Amplitude &Phase Balance, VSWR

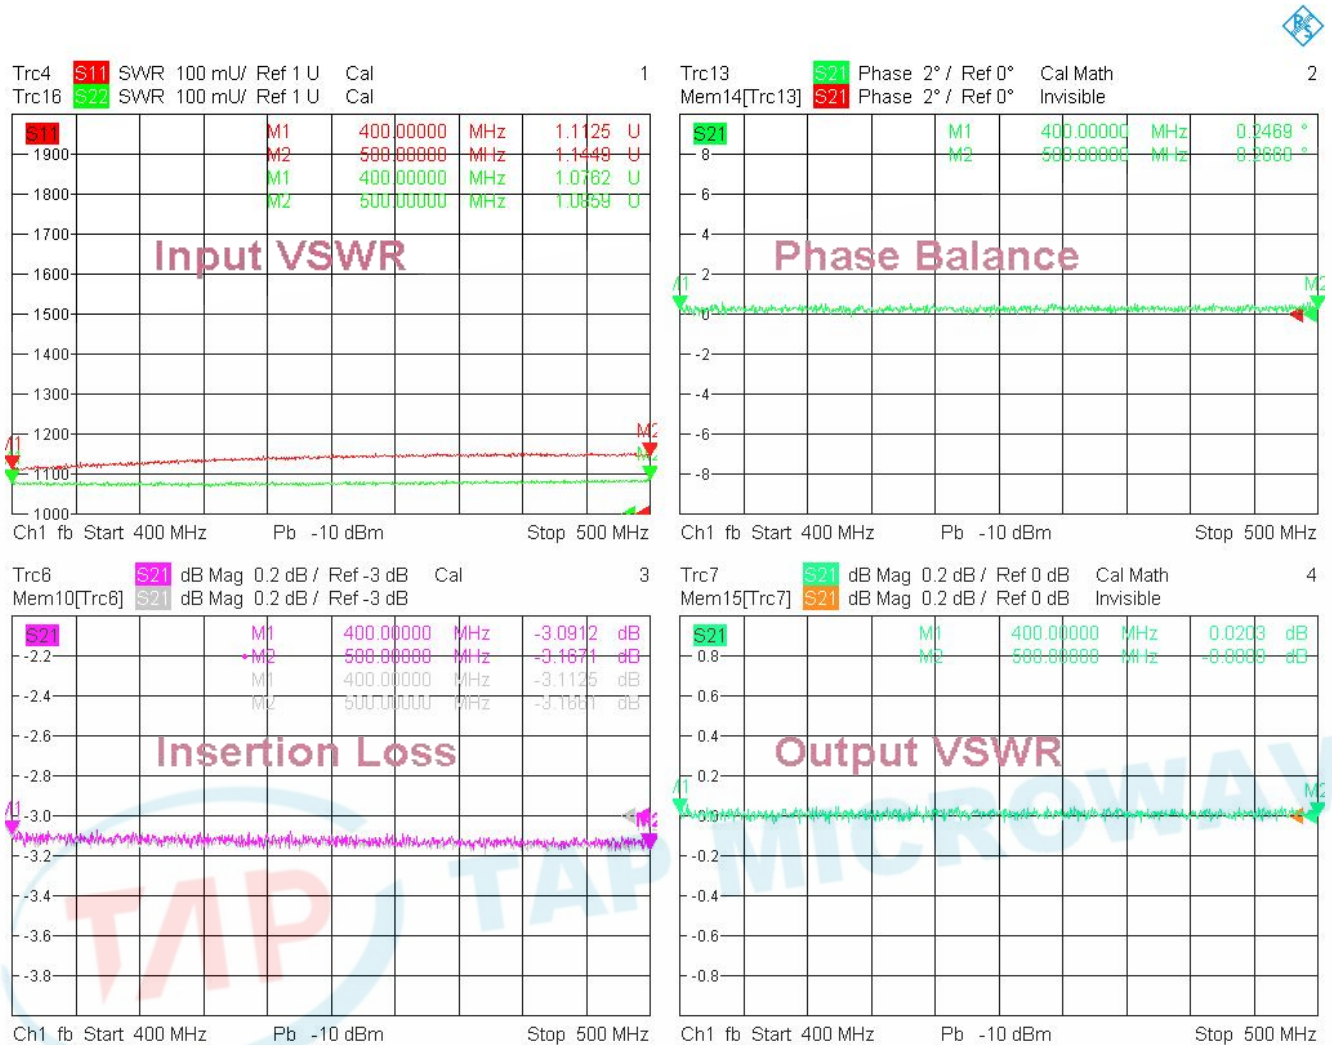

### 2. Isolation

