

Model THC95105NH

Features

Excellent phase& amplitude balance


Low Insertion Loss& VSWR

High Isolation

Technical Data Sheet

Frequency Range	9.5~10.5GHz	Finish	Painted Blue_ RAL #5007
Nominal Split	3.01dB	Connector Body	Passivated Stainless Steel
Insertion Loss	≤0.8dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥18dB		
Amplitude Balance	≤±0.5dB	Connector Pin	Beryllium Copper, Gold Plate
Phase Balance	≤±5°	Solder	Lead Free, RoHS Compliant
VSWR	≤1.40:1	Operating Temperature	-40~+85℃
¹ Power Handling	Average ≤70Watt Peak ≤1KW	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Waterproof Level	IP 66
Port Connectors	N-Female	Weight	90g

¹Power Handling guaranteed when load's VSWR within 1.50:1.

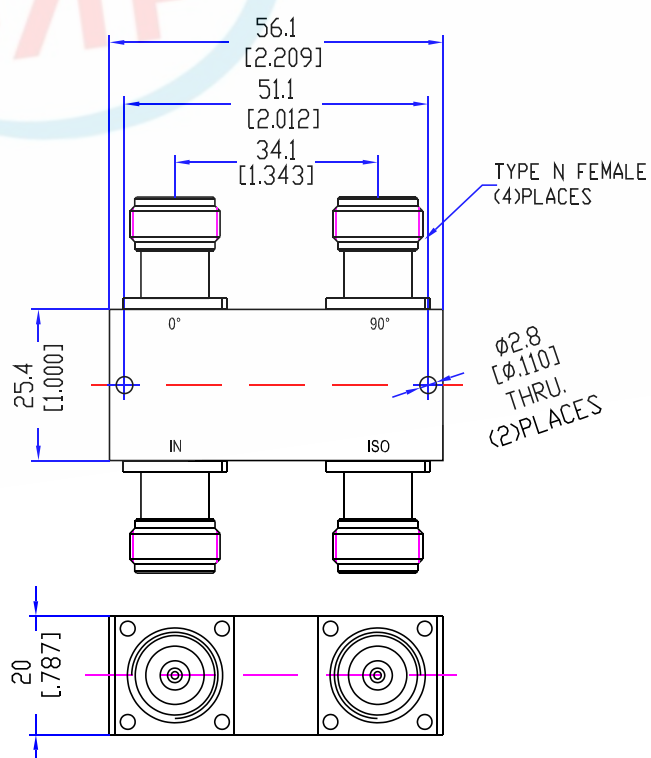

Typical Performance

1. Insertion Loss, Amplitude & Phase Balance, VSWR



2. Isolation

