


Model TPD0917N2D

Features

Excellent phase& amplitude balance
Low Insertion Loss& VSWR
High Isolation


Technical Data Sheet			
Frequency Range	950~1750MHz	Finish	Natural oxygen
Insertion Loss	≤0.35dB (Above 3.01dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.20:1 Output ≤1.15:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥25dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.2dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±2°	Operating Temperature	-40~+65°C
Power Handling	Forward ≤10Watt; Rev. ≤1Watt	Operating Humidity	Up to 95%,Non- Condensing
Impedance	50Ω	Weight	160g
Port Connectors	N-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

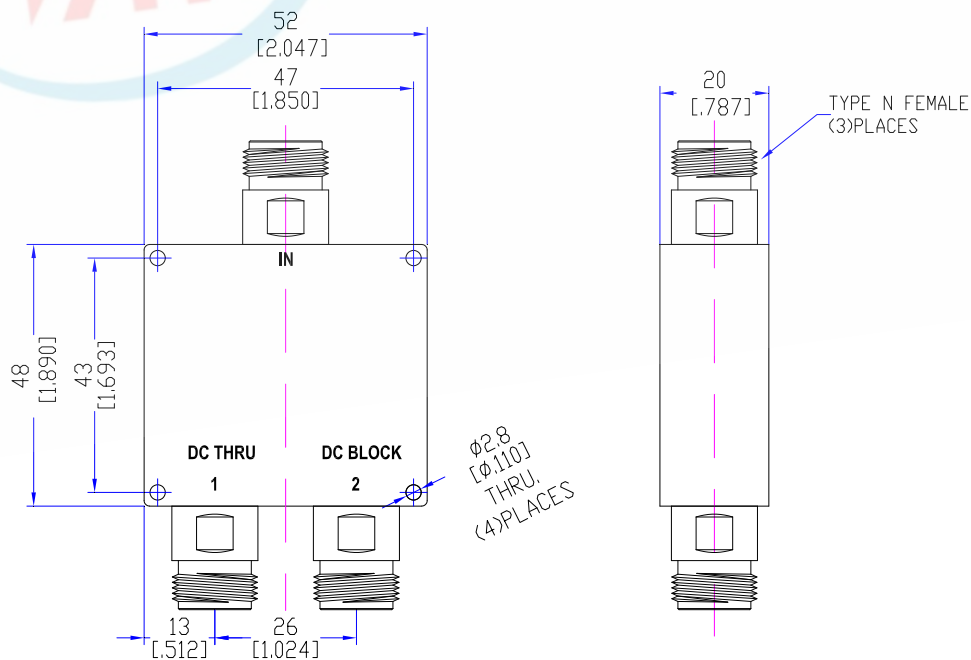


Typical Performance

1. Insertion Loss, Amplitude &Phase Balance, VSWR

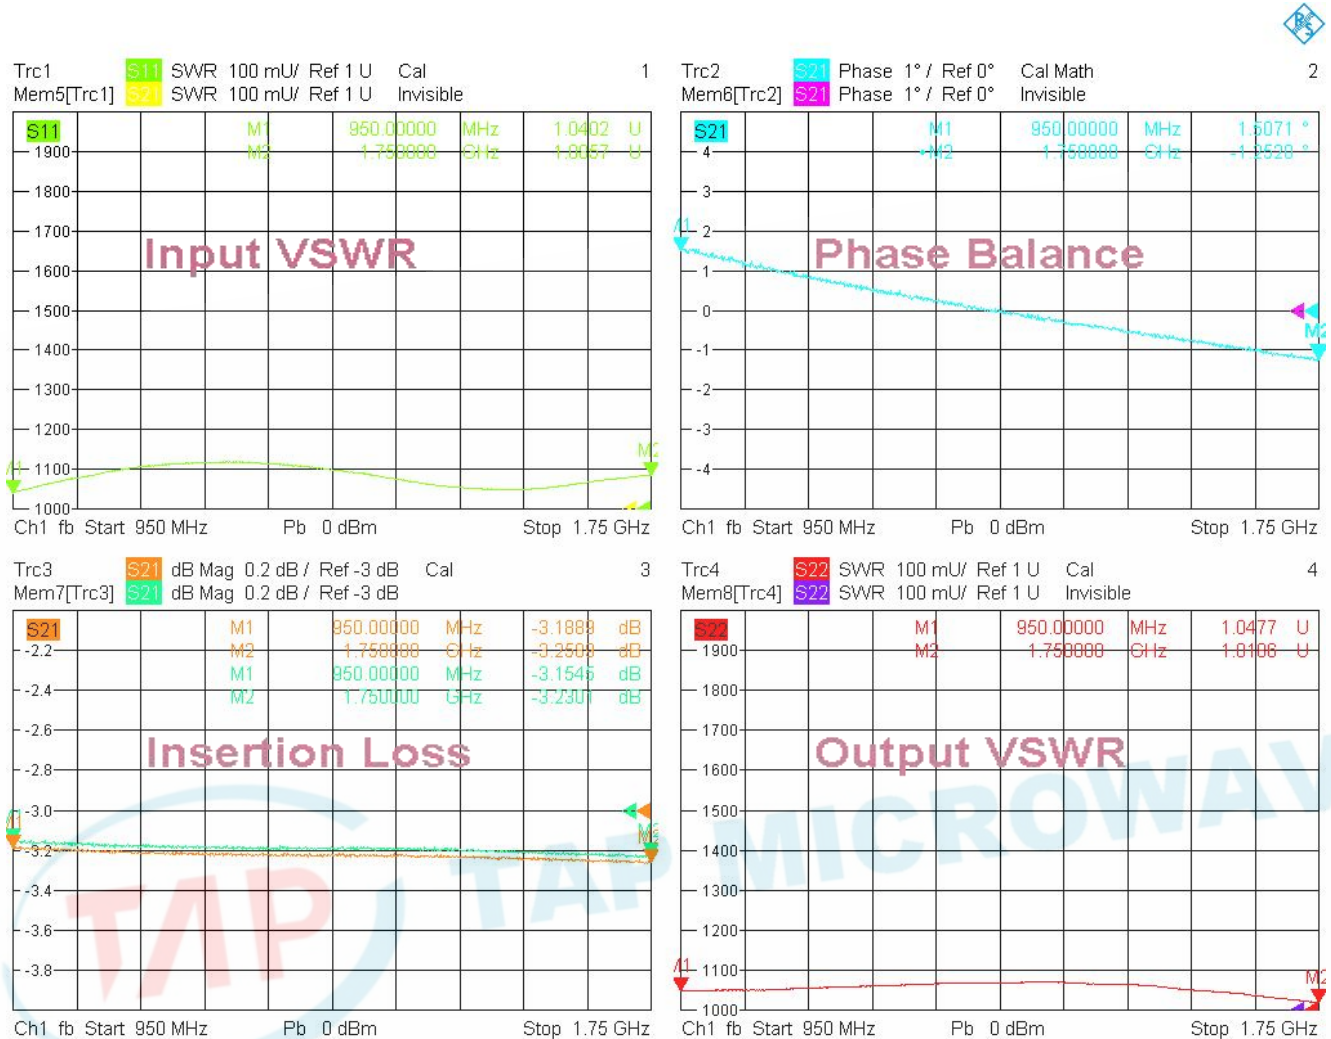

1/17/2022, 9:37 AM

2. Isolation

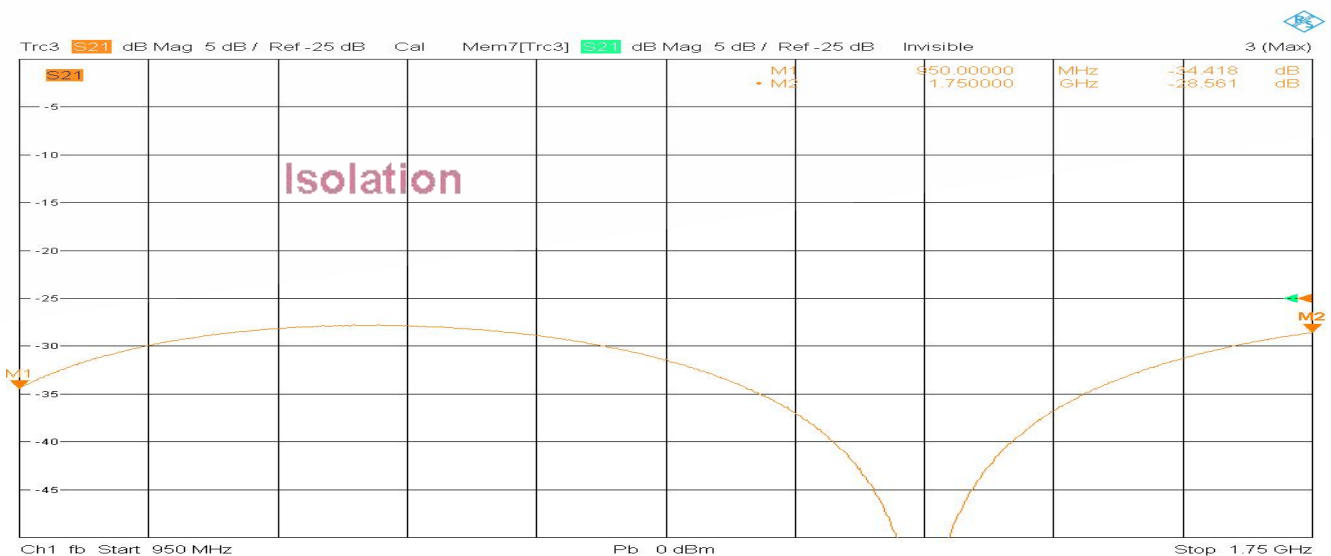

1/17/2022, 9:48 AM

