


Model TPD2454A10

Features

Excellent phase& amplitude balance
Low Insertion Loss& VSWR
High Isolation


Technical Data Sheet			
Frequency Range	2.4~5.4GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤1.8dB (Above 10.0dB Split)	Connector Body	Brass, Tri-Alloy Plate
VSWR	Input ≤1.50:1 Output ≤1.30:1	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Isolation	≥17dB	Connector Pin	Beryllium Copper, Gold Plate
Amplitude Balance	≤±0.8dB	Solder	Lead Free, RoHS Compliant
Phase Balance	≤±8°	Operating Temperature	-55~+85°C
¹ Power Handling	Forward ≤30Watt; Reversed ≤1Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	880g
Port Connectors	SMA-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

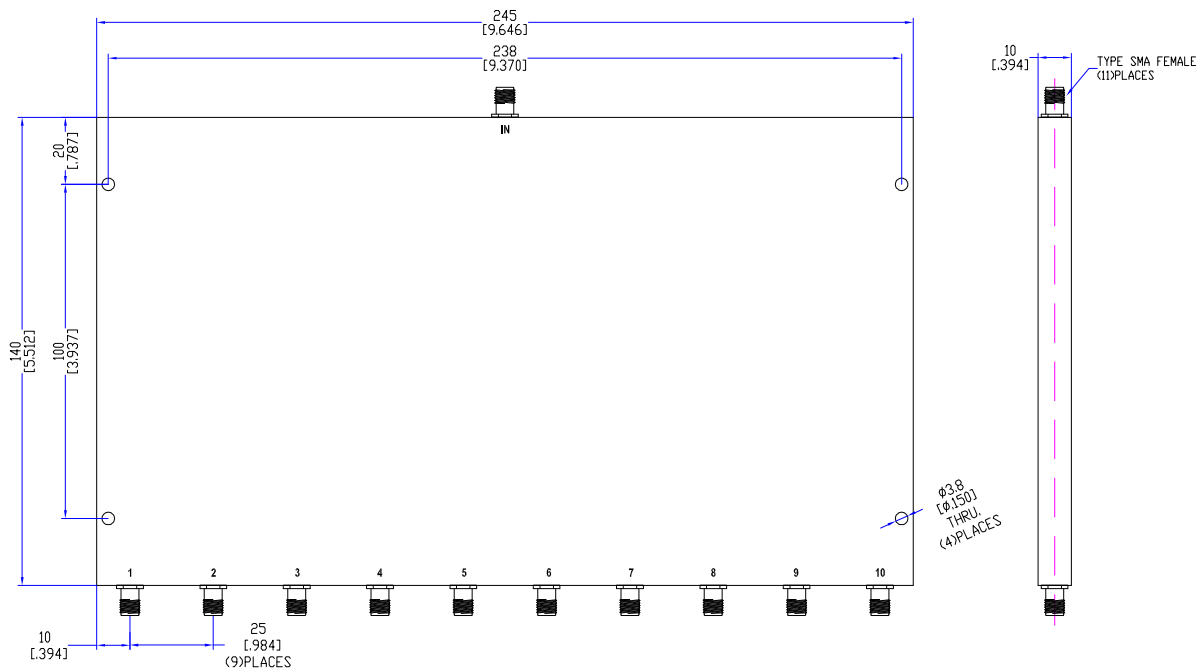


Typical Performance

1. Insertion Loss, Amplitude &Phase Balance, VSWR

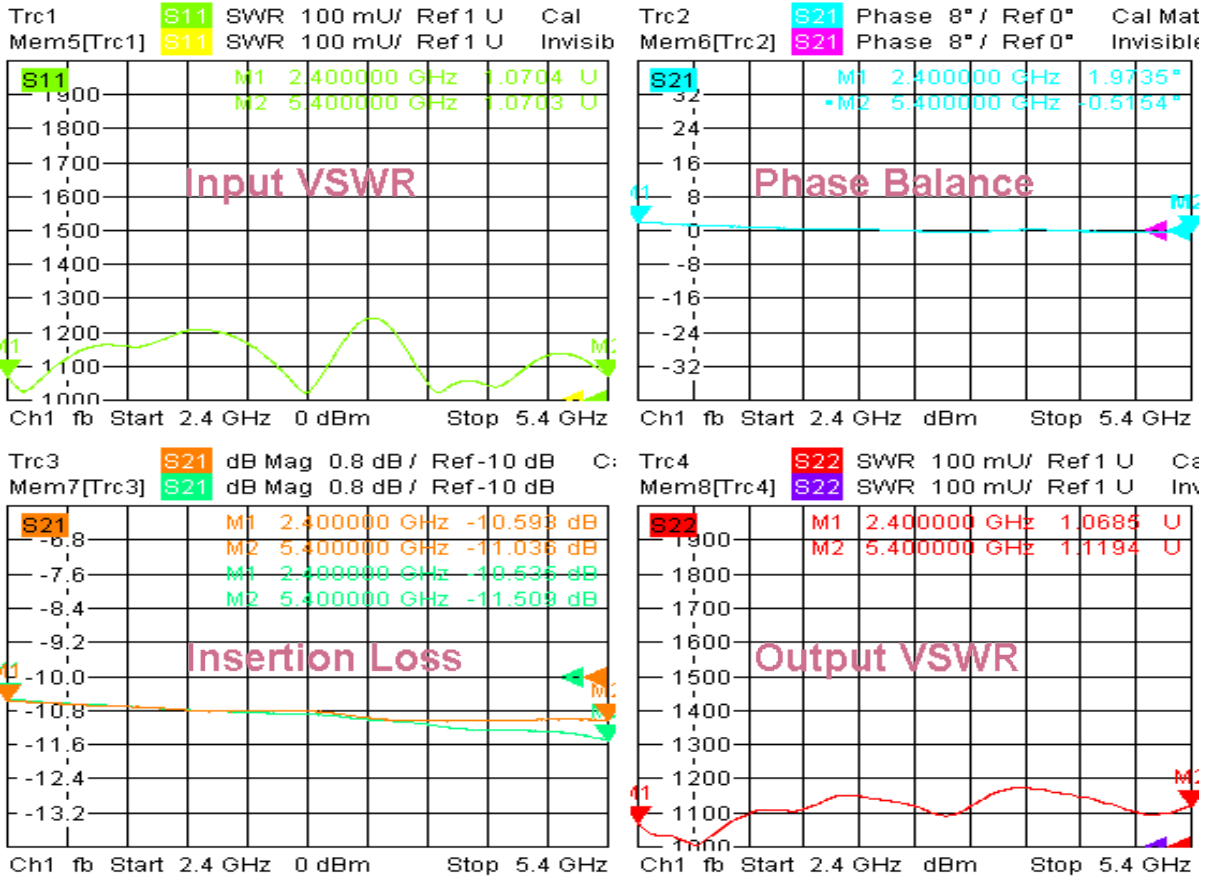

11/23/2020, 10:11 AM

2. Isolation

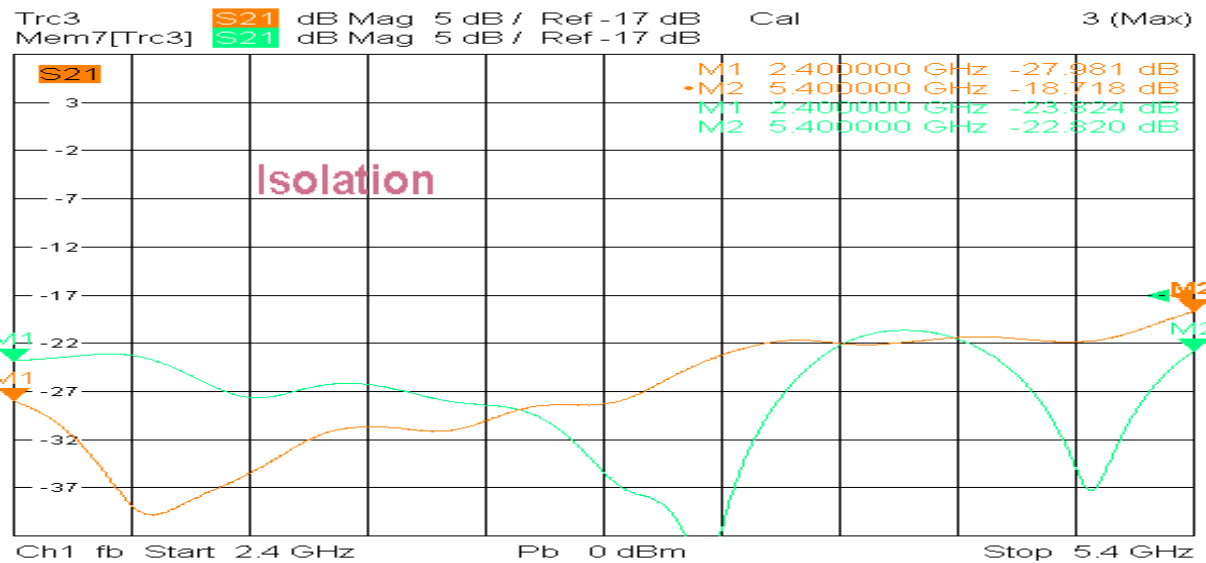

11/23/2020, 10:29 AM

