


Model TDC05265A13B

Features

Low VSWR
High Directivity
Broadband & Miniature Size





Technical Data Sheet			
Frequency Range	0.5~26.5GHz	Finish	Painted Blue_ RAL #5007
Insertion Loss	≤2.0dB (Excl. Coupling Loss 0.22dB)	Connector Body	Passivated Stainless Steel
Coupling Factor	≤13±1.5dB	Housing	Aluminum, 6061 T6 Clear Chem Conversion Film
Coupling Sensitivity	≤±2.0dB	Connector Pin	Beryllium Copper, Gold Plate
Directivity	≥8dB	Solder	Lead Free, RoHS Compliant
VSWR	Primary ≤1.50:1 Secondary ≤1.50:1	Operating Temperature	-55~+85°C
¹ Power Handling	Incident ≤20Watt; Reflected ≤20Watt	Operating Humidity	Up to 95%, Non- Condensing
Impedance	50Ω	Weight	70g
Port Connectors	2.92mm-Female		

¹Power Handling guaranteed when load's VSWR within 1.50:1.

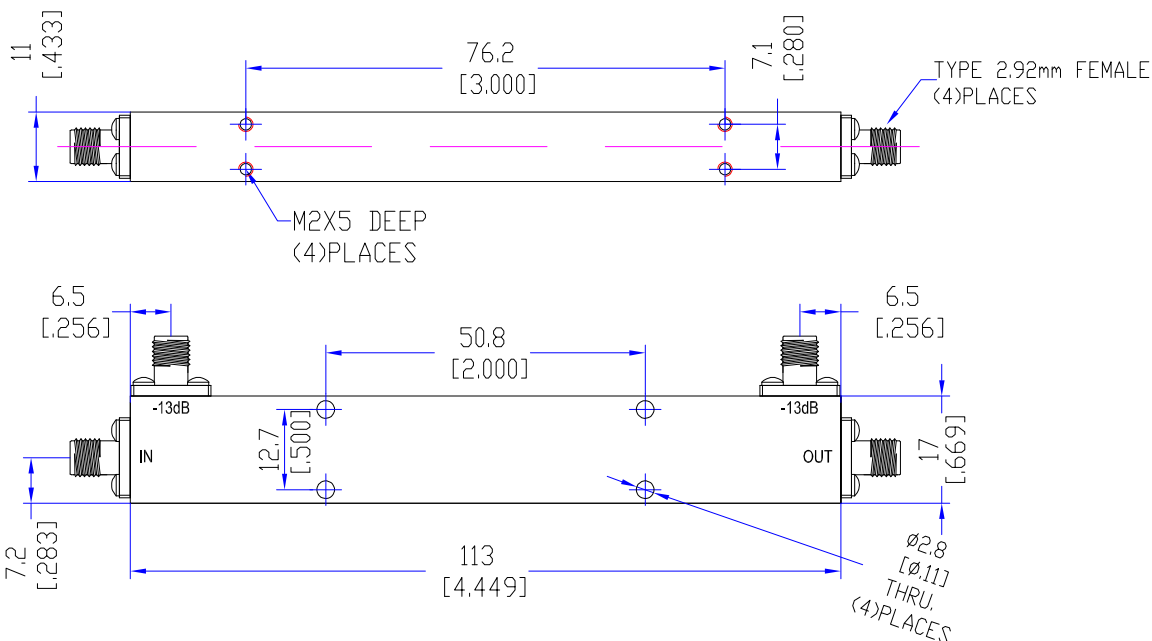

Typical Performance

1. Coupling Factor & Sensitivity, Isolation, VSWR

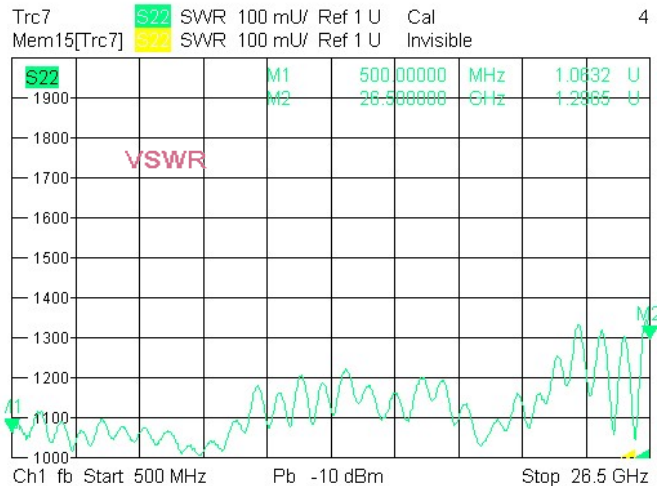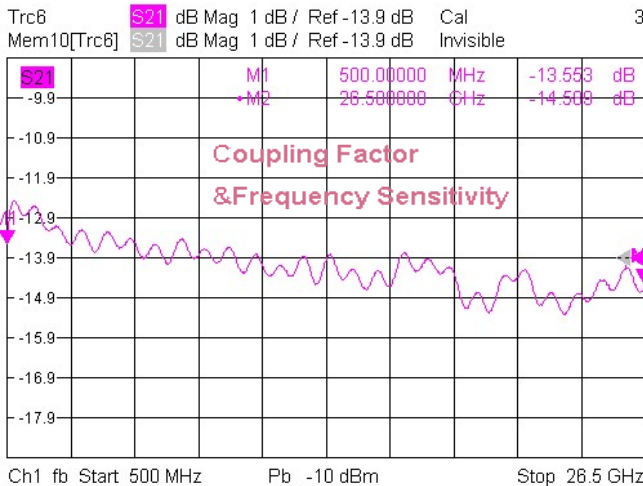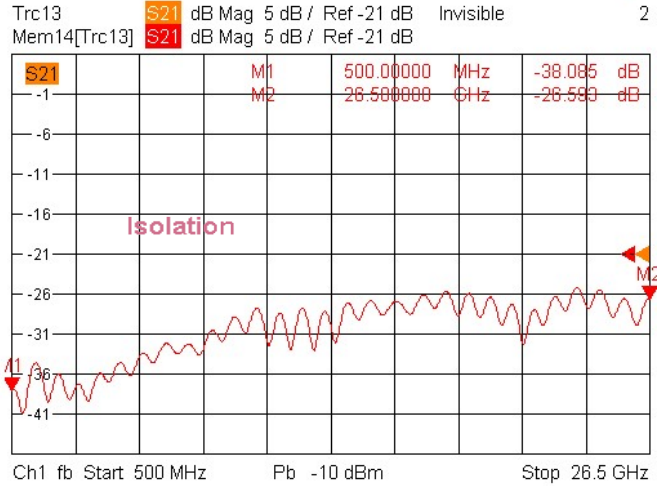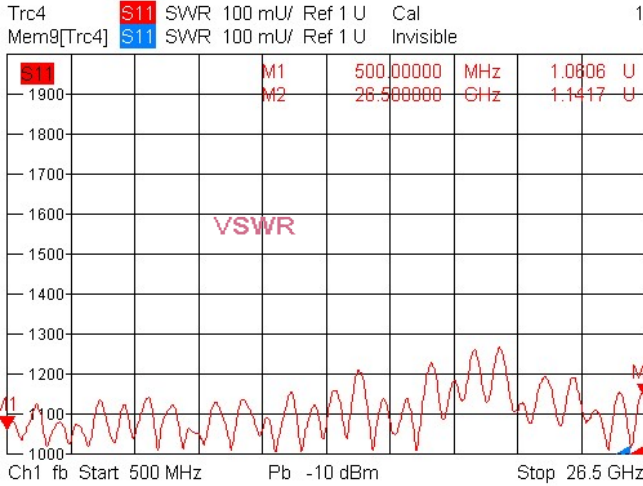


3/7/2022, 10:16 AM




Typical Performance

2. Coupling Factor & Sensitivity, Isolation, VSWR

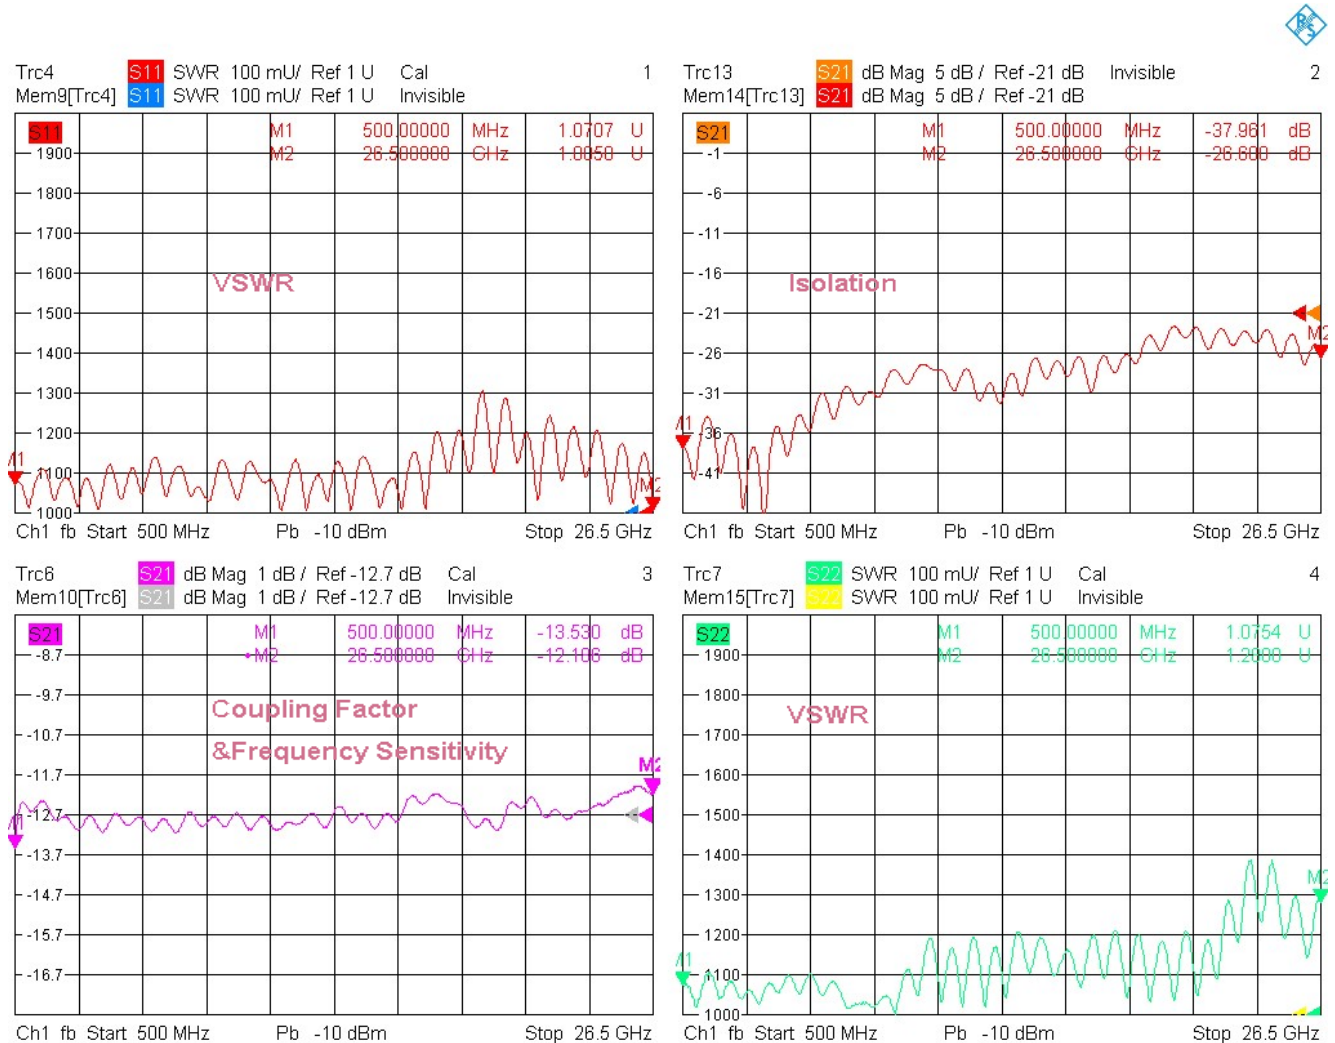

3/7/2022, 10:16 AM

3. Insertion Loss

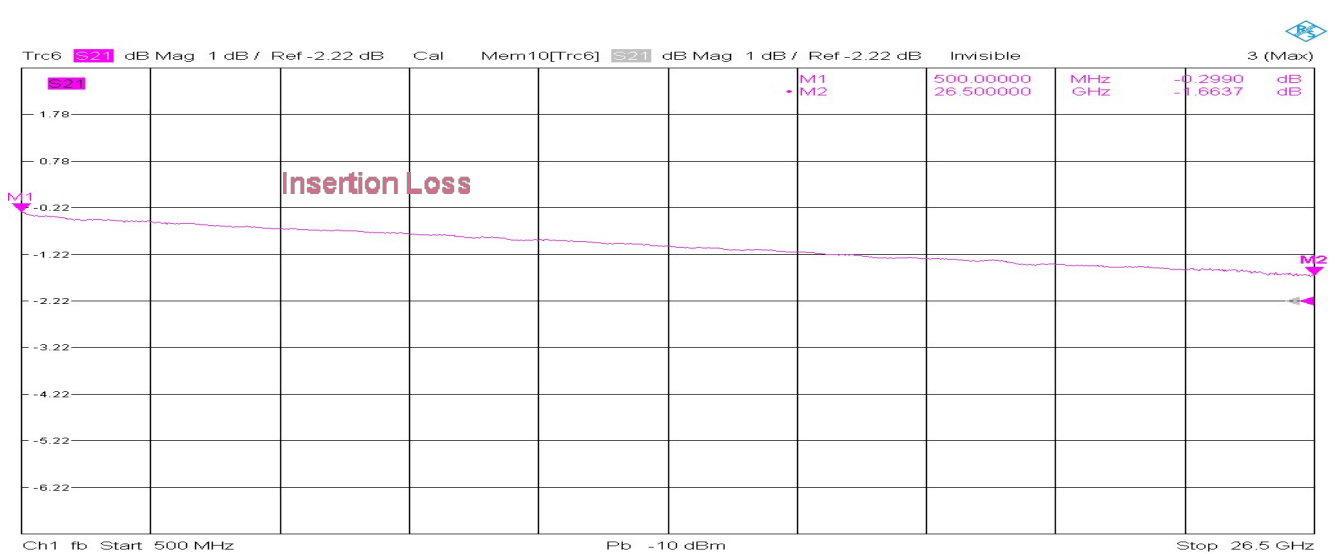

3/7/2022, 10:17 AM

